



The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

so certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1985 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Andrew Gersey

Dated

12 December 2005

Patents Form 1/77

Patents Act 1977
(Rule 16)THE PATENT OFFICE
RM

13 AUG 2004

RECEIVED BY FAX

177

13AUG04 E918754-1 827982

P01/7700 0.00-0418107.9 NONE

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

IPW. 04. 002

2. Patent application number

(The Patent Office will fill this part in)

0418107.9

13 AUG 2004

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

IPWireless Inc.

1001 BAYHILL DRIVE

SECOND FLOOR

SAN BRUNO
CA 94066

USA, DELAWARE 8769401002

4. Title of the invention

APPARATUS AND METHOD FOR COMMUNICATING
USER EQUIPMENT SPECIFIC INFORMATION IN
CELLULAR COMMUNICATION SYSTEM

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

RENE JEPSEN

ELTINA CONSULTING

GROVE HOUSE

LUTYENS CLOSE

CHINEHAM COURT

BASINGSTOKE, HANTS

RG24 8AG

Anthony Wray

OPTIMUS

Grove House

Lutyens Close

Chineham Court

Basingstoke

RG24

8AG

Patents ADP number (if you know it)

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)

Number of earlier UK application

Date of filing
(day / month / year)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request?

YES

Answer YES if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

Otherwise answer NO (See note d)

Patents Form 1/77

Patents Form 1/77

9. Accompanying documents: A patent application must include a description of the invention. Not counting duplicates, please enter the number of pages of each item accompanying this form:

Continuation sheets of this form

Description

Claim(s)

Abstract

Drawing(s)

32 / 37
6
1
2 only for

R McC
T. Waters
confirmed

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for a preliminary examination and search (Patents Form 9/77)

Request for a substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature(s)

René P. Jepsen

Date 13/8/04

12. Name, daytime telephone number and e-mail address, if any, of person to contact in the United Kingdom

RENE JEPSEN

01793 322 512

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered YES in part 8, a Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- Part 7 should only be completed when a divisional application is being made under section 15(4), or when an application is being made under section 8(3), 12(6) or 37(4) following an entitlement dispute. By completing part 7 you are requesting that this application takes the same filing date as an earlier UK application. If you want the new application to have the same priority date(s) as the earlier UK application, you should also complete part 6 with the priority details.

DUPLICATE

**APPARATUS AND METHOD FOR COMMUNICATING USER EQUIPMENT
SPECIFIC INFORMATION IN CELLULAR COMMUNICATION SYSTEM**

5

Field of the invention

The invention relates to an apparatus and method for communicating user equipment specific information in
10 cellular communication system and in particular, but not exclusively, to communication of transmit power control and synchronisation data.

15 Background of the Invention

In the last decades, cellular communication systems for mobile communication have become commonplace. Originally cellular communication systems provided only voice services
20 but over time an increasing number of services have been provided either through enhancements to existing cellular communication systems or through the development of new cellular communication systems.

25 For example, 3rd generation cellular communication systems have been, and are being, standardized by the 3rd Generation Partnership Project (3GPP). These 3rd generation cellular communication systems have been standardised to provide a large number of different services aimed at different
30 applications.

In particular data packet services suitable for data communication are supported by most cellular communication systems. For example, downlink packet data services are supported within the 3GPP release 5 specifications in the form of the High Speed Downlink Packet Access (HSDPA) service. In this system, transmission code resources are shared amongst users according to their traffic needs. The base station or "Node-B" is responsible for allocating and distributing the resources to the users, within a so-called scheduling task.

The allocation information itself is transmitted to the users via a High Speed - Shared Common Control CHannel (HS-SCCH). This furnishes the user equipment (UE) with knowledge of the forthcoming transmission on the HSDPA shared resources (the High Speed - Downlink Shared Channel - HS-DSCH). The UE can thus prepare itself and configure its receiver appropriately for the transmission.

In addition to these shared resources used for data and signalling purposes, the current release 5 specifications mandate the existence of associated uplink and downlink Dedicated Physical CHannels (DPCH's).

In accordance with the 3GPP specifications, the HSDPA service may be used in both Frequency Division Duplex (FDD) mode and Time Division Duplex (TDD) mode.

For the FDD mode, the purpose of these channels is:

Downlink DPCH:

3

- to potentially carry data from the layers above the physical layer (provided that any data is mapped to the Dedicated CHannel (DCH))
- to carry Transmit Power Control (TPC) commands to the UE to control the uplink DPCH
- to carry downlink pilot symbols to the UE (these symbols are used to derive channel quality feedback for transmission to the base station and to facilitate demodulation of downlink signals)

10

Uplink DPCH:

- to carry data from the layers above the physical layer
- to carry TPC feedback for the downlink DPCH

15

For the TDD mode, the purpose of these channels is:

1.28Mcps TDD service

- to carry data from the layers above the physical layer (provided that any data is mapped to the DCH)
- to carry TPC data for the uplink DPCH power control
- to carry SS for uplink DPCH synchronisation

25 3.84Mcps TDD Service

- to carry data from the layers above the physical layer (provided that any data is mapped to the DCH)

A disadvantage of the current approach for HSDPA is that the assignment of a dedicated channelisation code to each active user equipment consumes a large fraction of the available code resources. The channelisation code is used by the Code

Division Multiple Access (CDMA) system to separate between data for different user equipment. In a 3rd Generation cellular communication system, the number of available channelisation codes that can be used by a base station is significantly limited on the downlink for FDD and TDD, and on the uplink for TDD. In addition, the transmit power associated with transmission of the control information to the individual user equipment causes interference to other communications. Accordingly the current approach may significantly reduce the code and power resources available for use by other channels, such as for the HS-DSCH.

The HS-DSCH is especially efficient at handling bursty user traffic profiles, such as are common in packet-data communication systems. Dedicated channels on the other hand are generally more suited to constant bit rate applications, such as voice, and some types of video conferencing technologies. These services are generally termed "conversational class" services. When using HSDPA packet data services without the existence of parallel conversational class services, it is possible to map all higher layer data for downlink onto other downlink transport channels than the DCH. In such situations, only very little information is communicated on the DPCH physical channel.

Specifically, only the following information may in some cases be carried by the DPCH:

FDD

- TPC commands for uplink DPCH power control
- Dedicated pilot symbols for downlink

1.28 Mcps TDD

- TPC commands for uplink DPCH power control
- SS commands for uplink DPCH synchronisation

5 3.84Mcps TDD

- <no uses>

As the data rate for this information is extremely low, the use of a dedicated DPCH results in a highly inefficient communication. Therefore, it would be advantageous if a more efficient means of communicating dedicated UE specific information to individual UEs could be found. In particular, it would be advantageous to more efficiently carry the TPC/pilot/SS information to the user equipment such that the requirement for an associated downlink DPCH to exist with each HSDPA service could be removed or relaxed.

One solution which has been proposed is known as the "fractionated DPCH" (F-DPCH) concept. This approach is only applicable to FDD and seeks to improve the channelisation code efficiency of HSDPA. In this concept, for HSDPA "data-only" users (ie: those with no conversational-class traffic), downlink signalling (DCCH) and traffic (DTCH) are not mapped to a DCH transport channel but are instead mapped to either the HS-DSCH or FACH transport channels.

Furthermore, in the F-DPCH concept, the downlink code resources used for transmission of TPC and (possibly) pilot symbols are time multiplexed onto the same channelisation code which may be continuously transmitted.

However, although the proposed time multiplexing of data onto a transmitted channelisation code may be suited for

some applications, it may be disadvantageous in other circumstances.

For example, the FDD F-DPCH concept is unsuitable for TDD communication.

Specifically, the TDD data is transmitted in timeslots with a data portion either side of a midamble portion and a guard-period at the end of the burst. The midamble portion must be received in order to detect, demodulate and receive the data payload portions. Thus a whole timeslot must be received to transfer any data.

Furthermore for TDD, the maximum channelisation code spreading factor is 16, whereas for FDD it is 256. Thus, whereas the minimum unit of transmission for TDD is one timeslot with one channelisation code at spreading factor 16, the minimum transmission unit for FDD may be much smaller and it is therefore much better suited for transmission of small amounts of UE specific data. For example, the minimum transmission unit for 1.28Mcps TDD (1 timeslot, 1 code at SF16, QPSK modulation) communication comprises 88 bits. It is clear that the minimum transmission unit for TDD is therefore too large to efficiently carry the TPC and SS information which is typically only 3 bits.

Some of the above disadvantages may be alleviated through the use of a duty-cycle wherein data is transmitted to users using a single minimum transmission unit only one frame in every "N" frames. However, this has the disadvantage that the update rate of the signalling is substantially reduced

7

and this will greatly impair the performance of the power control and synchronisation loops.

Thus, the current approach for transmitting small amounts of 5 UE specific information to individual UEs is inefficient, cumbersome and may result in low update rates.

Hence, an improved system for communicating user equipment specific information in a cellular communication system 10 would be advantageous.

Summary of the Invention

15 Accordingly, the Invention seeks to preferably mitigate, alleviate or eliminate one or more of the above mentioned disadvantages singly or in any combination.

According to a first aspect of the invention there is 20 provided an apparatus for transmitting user equipment specific information from a base station to a user equipment in a cellular communication system; the apparatus comprising: means for combining user equipment specific information for a plurality of user equipment to generate 25 combined user equipment specific information; means for encoding the combined user equipment specific information; and means for transmitting the combined user equipment specific information in a minimum transmission resource unit.

30

The UE specific information may be control information.

- The invention may allow a more efficient communication of user equipment (UE) specific information. In particular, low amounts of UE specific information may efficiently be communicated with high update rates. For example, in
- 5 situations where the UE specific information is significantly less than the capacity of a minimum transmission resource unit, the overhead associated with communicating the information may be substantially reduced
- 10 Embodiments of the invention may provide reduced interference, increased update rates, reduced transmit resource usage and/or improved performance of the cellular communication system as a whole. In particular, the cellular communication system's usage of code and power resources
- 15 could be significantly improved and system capacity could be correspondingly increased.

According to an optional feature of the invention, the minimum transmission resource unit is a time slot. The

20 invention may allow an efficient communication of UE specific information for a plurality of UEs in a single time slot. In embodiments, such as for the 3GPP TDD system, the minimum transmission resource unit may be a channelisation code on a time slot.

25

According to an optional feature of the invention, the minimum transmission resource unit is a single time code frequency resource allocation unit.

- 30 The invention may allow an efficient communication of UE specific information for a plurality of UEs in a single time code frequency resource allocation unit. The time code

frequency resource allocation unit uses a single code in a time interval on a single frequency carrier. In embodiments wherein code division is not used, the time code frequency resource allocation unit will inherently be associated with
5 a single code (corresponding to no spreading or channelisation or code division). In embodiments wherein time division is not used, the time code frequency resource allocation unit will inherently be associated with a single time interval.

10

According to an optional feature of the invention, the means for encoding is operable to jointly encode user equipment specific information for at least two of the plurality of user equipment.

15

The joint encoding may be such that encoded data relating to a first user equipment is determined in response to user equipment specific information associated with at least a second user equipment. The joint encoding may be such that
20 at least one data bit of the encoded data comprises information relating to UE specific information for more than one user equipment.

The feature may allow a more efficient communication of the UE specific information. For example, if three parameters of the UE specific information may take on five potential values, each individual parameter requires three data bits to represent the actual value. However, the total number of possible values for the three parameters is $(5^3)=125$ potential values. Hence a combined parameter value may be represented by seven bits rather than the nine bits required for individual coding. The optional feature may in some embodiments allow a binary signalling efficiency which is increased by combining the data streams for more than one UE.

According to an optional feature of the invention, the means for encoding is operable to jointly encode user equipment specific information associated with all user equipment of the plurality of user equipment. This may improve the encoding efficiency.

According to an optional feature of the invention, the encoding comprises forward error correcting coding. This may improve performance of the communication of the UE specific information. A joint forward error correcting coding may be applied to UE specific information for a plurality of UEs. This may provide enhanced error correcting performance compared to only applying the error correction to individual data for a single UE. In particular improved time diversity may be achieved. Interleaving may be performed as part of the forward error correction coding.

According to an optional feature of the invention, the user equipment specific information comprises a plurality of parameters each having a number of possible values, and the

means for encoding is operable to encode the plurality of parameters by encoding a combined parameter having a combined number of possible values equal to the product of the number of possible values of the plurality of
5 parameters. This provides for improved efficiency and/or facilitated implementation. For example, a first parameter having five possible values, a second parameter having six possible values and a third parameter having seven possible values may be encoded by encoding of a combined parameter
10 having $5 \times 6 \times 7 = 210$ possible values, i.e. by eight bits rather than $3 \times 3 = 9$ bits.

According to an optional feature of the invention, the user equipment specific information comprises power control
15 information. The invention may provide an efficient means for communicating power control information. In particular, a low overhead and/or high update rate may be achieved. Power control information typically comprises small amounts of information to be communicated at a sufficiently high
20 data rate and the invention may therefore provide a particularly advantageous means of operating a power control loop over the air interface.

According to an optional feature of the invention, the user
25 equipment specific information comprises synchronisation information.

The synchronisation information may e.g. be code synchronisation and/or timing synchronisation including data
30 symbol timing synchronisation.

The invention may provide an efficient means for communicating synchronisation information. In particular, a low overhead and/or high update rate may be achieved. Synchronisation information typically comprises small
5 amounts of information to be communicated at a sufficiently high data rate and the invention may therefore provide a particularly advantageous means of operating a power control loop over the air interface.

- 10 The UE specific information may in some embodiments consist in power control information and synchronisation.

According to an optional feature of the invention, the user equipment specific information comprises only
16 synchronisation information. This may improve the efficiency of communication of control information in some systems as the data rate may be reduced. For example, power control may be achieved through other means such as open loop power control loop methods.

20

According to an optional feature of the invention, the user equipment specific information is associated with an uplink channel from each of the plurality of user equipment.

- 25 The uplink channel may for example be a dedicated physical channel of the cellular communication system and the user equipment specific information may be control information associated with the uplink channel. The invention may thus provide an efficient means of e.g. controlling or managing
30 an uplink channel by transmission of downlink data using little communication resource and having a high update rate.

According to an optional feature of the invention, the apparatus further comprises means for setting a transmit power for the minimum transmission resource unit in response to a transmit power requirement of the plurality of user
5 equipment.

Specifically, a required or desired transmit power may be determined for each user equipment of the plurality of user equipment and the transmit power of the minimum transmission
10 resource unit may be set to the highest determined transmit power. This may ensure an efficient communication with low transmit power resource use while ensuring that all user equipment of the plurality of user equipment receive a signal of adequate quality.

15

According to an optional feature of the invention, the apparatus further comprises means for transmitting position information indicative of a position of user equipment specific information for a first user equipment.

20

The position information may indicate the position of data for the first user equipment within the minimum transmission resource unit. The position information may enable or assist an individual user equipment in determining the user
25 specific data for that individual user equipment within the combined information stream. The position information may be an explicit and/or direct indication or may for example be an associative and/or indirect indication.

30 According to an optional feature of the invention, the user equipment specific information is control information

associated with a High Speed Downlink Packet Access (HSDPA) service.

The High Speed Downlink Packet Access (HSDPA) may
5 specifically be the HSDPA service specified by the 3rd
Generation Partnership Project (3GPP). The invention may
thus provide for an efficient communication of control
information for an HSDPA service and may in particular
provide for an efficient control or feedback for uplink
10 communication.

According to an optional feature of the invention, the user
equipment specific information is associated with an uplink
dedicated physical channel (DPCH) of the HSDPA downlink
15 packet data service.

In particular, the DPCH may be an uplink dedicated physical
channel (DPCH) as standardized by 3GPP. The invention may
provide an extremely efficient control of uplink DPCH
20 channels with a low resource use and a high performance due
to a high update rate.

According to an optional feature of the invention, the means
for encoding is operable to encode the combined user
25 equipment specific information by using processing
algorithms of a group of algorithms used by a plurality of
services.

The plurality of services may be dedicated or shared
30 channels and may correspond to data communication using
other physical or logical channels than used for the minimum
transmission resource unit. Specifically for a 3GPP

15

embodiment, the encoding of the UE specific information may use standardised 3GPP transport channel processing methods. Thus a toolbox of standardised algorithms and processes may be used to map the multiplexed, concatenated, or otherwise
5 combined user data from the plurality of users to common physical resources. This may facilitate encoding and may allow for reduced complexity of the apparatus as functionality may be shared.

- 10 According to an optional feature of the invention, the cellular communication system is a Time Division Duplex (TDD) cellular communication system.

The cellular communication system may specifically implement
15 the 1.28 Mcps mode variant of the 3GPP TDD system. The user equipment specific information may be user equipment specific information associated with a TDD uplink communication.

- 20 According to an optional feature of the invention, the cellular communication system is a UTRA (UMTS (Universal Mobile Telecommunication System) Terrestrial Radio Access) TDD cellular communication system specified by the 3rd Generation Partnership Project. The invention may provide a
25 particularly advantageous and efficient means of communicating UE specific information specifically suitable for and compliant with the UTRA TDD system.

According to an optional feature of the invention, the user
30 equipment specific information consists of Transmit Power Control (TPC) and Synchronisation Shift (SS) data. The invention may provide a particularly advantageous and

efficient means of communicating TPC and SS data in a UTRA TDD system. The invention may allow a reduced resource use, improved performance and/or increased update rate. For example, an efficient and frequent communication of TPC and 5 SS data may be accomplished resulting in improved performance of an associated uplink DPCH.

According to an optional feature of the invention, the apparatus further comprises means for determining a transmit 10 power of the minimum transmission resource unit in response to a number of user equipment for which the minimum transmission resource unit comprises user equipment specific information.

15 This may improve the reliability of the communication and/or may reduce the resource use and/or caused interference. For example, if UE specific information is communicated only to a few users, increased redundancy may be introduced and the transmit power may be reduced.

20

According to an optional feature of the invention, the apparatus further comprises means for determining an encoding process for the minimum transmission resource unit in response to a number of user equipment for which the 25 minimum transmission resource unit comprises user equipment specific information.

This may improve the reliability of the communication and/or may reduce the resource use and/or caused interference. The 30 encoding process may for example include a forward error correcting coding process. For example, if UE specific information is communicated only to a few users, a high

performance forward error correcting code (with high redundancy and thus low data rate) may be used with a reduced transmit power.

- 5 According to an optional feature of the invention, the minimum transmission resource unit does not comprise verification data.

This may provide a reduced overhead and may exploit that
10 general reliability of the minimum transmission resource unit is typically not important to the individual UE as only errors in the UE specific information for the UE will have an impact. Errors experienced by a UE in the UE specific information may not directly affect the reliability of the
15 information for other UEs.

According to an optional feature of the invention, the means for transmitting is operable to transmit user equipment specific information for a first user in intermittent
20 minimum transmission resource units.

For example, UE specific information for a specific UE may only be transmitted in every other minimum transmission resource unit. This may improve the communication efficiency
25 and may provide an increased flexibility of the resource allocation for communication of UE specific information.

According to an optional feature of the invention, the minimum transmission resource unit corresponds to a minimum
30 size transmission block of user equipment specific information which can be transmitted by the means for transmitting.

In some embodiments, the minimum transmission resource unit may be the smallest data block which can be allocated by a resource scheduler for transmission by the means for transmitting. Specifically, in some embodiments, the minimum transmission resource unit may be the smallest data block or unit which can be transmitted individually in accordance with the specifications of the cellular communication system. For example, for a 3GPP TDD communication system, the minimum transmission resource unit may be a single channelisation code in a single time slot on a single carrier.

The apparatus may be a base station also known as a Node B in some cellular communication systems.

According to a second aspect of the invention, there is provided a user equipment for receiving user equipment specific information from a base station in a cellular communication system; the apparatus comprising: means for receiving a minimum transmission resource unit comprising combined user equipment specific information for a plurality of user equipment; and means for determining user specific information for the user equipment from the minimum transmission resource unit.

According to an optional feature of the invention the combined user equipment specific information is jointly encoded; and the means for determining comprises means for decoding the combined user equipment specific information and for selecting the user equipment specific information for the user equipment.

According to a third aspect of the invention, there is provided a cellular communication system comprising: a first apparatus for transmitting user equipment specific
5 information from a base station to a user equipment, the first apparatus comprising: means for combining user equipment specific information for a plurality of user equipment to generate combined user equipment specific information, means for encoding the combined user equipment
10 specific information, and means for transmitting the combined user equipment specific information in a minimum transmission resource unit; and the user equipment comprising: means for receiving a minimum transmission resource unit comprising combined user equipment specific
15 information for a plurality of user equipment; and means for determining user specific information for the user equipment from the minimum transmission resource unit.

According to a fourth aspect of the invention, there is
20 provided a method of transmitting user equipment specific information from a base station to a user equipment in a cellular communication system; the method comprising the steps of: combining user equipment specific information for a plurality of user equipment to generate combined user
25 equipment specific information; encoding the combined user equipment specific information; and transmitting the combined user equipment specific information in a minimum transmission resource unit.

30 According to a fifth aspect of the invention, there is provided method of receiving user equipment specific information from a base station in a cellular communication

system; the method comprising the steps of: receiving a minimum transmission resource unit comprising combined user equipment specific information for a plurality of user equipment; and determining user specific information for the 5 user equipment from the minimum transmission resource unit.

These and other aspects, features and advantages of the invention will be apparent from and elucidated with reference to the embodiment(s) described hereinafter.

10

Brief Description of the Drawings

An embodiment of the invention will be described, by way of 15 example only, with reference to the drawings, in which

FIG. 1 illustrates a cellular communication system in accordance with an embodiment of the invention; and

20 FIG. 2 illustrates an example of an encode processor for a base station in accordance with an embodiment of the invention.

25 Detailed Description of an Embodiment of the Invention

FIG. 1 illustrates a cellular communication system 100 in accordance with an embodiment of the invention.

30 The cellular communication system 100 comprises a base station, henceforth referred to as a Node B 101 in accordance with the terminology used for 3rd generation

cellular communication systems. The Node B 101 communicates with a plurality of User Equipment (UE) (of which only one 103 is shown) as is well known by the person skilled in the art.

5

The UE 103 may be a subscriber unit, a wireless user equipment, a mobile station, a communication terminal, a personal digital assistant, a laptop computer, an embedded communication processor or any communication element capable
10 of communicating over the air interface of the cellular communication system.

The Node B 101 is further coupled to a fixed network which interconnects base stations and is operable to route data
15 between any two base stations, thereby enabling a UE in a cell to communicate with a UE in any other cell. In addition, the fixed network comprises gateway functions for interconnecting to external networks such as the Public Switched Telephone Network (PSTN), thereby allowing UEs to
20 communicate with landline telephones and other communication terminals connected by a landline. Furthermore, the fixed network comprises much of the functionality required for managing a conventional cellular communication network including functionality for routing data, admission control,
25 resource allocation, subscriber billing, mobile station authentication etc. The fixed network may specifically include Radio Network Controllers (RNCs) and a core network as well known to the person skilled in the art.

30 In the embodiment of FIG. 1, the Node B 101 supports one or more services of the UE 103. In the example, the Node B 101 frequently communicates very small amounts of data to the UE

103. The data is UE specific information that is not applicable or relevant to other UEs. The UE specific information may be data which is part of a communication service provided to the UE 103 or may be data which is
5 communicated in support of the services provided to the UE 103.

As a specific example, the Node B 101 may in the embodiment of FIG. 1 transmit 3 bits of data to the UE 103 every five
10 msec.

In addition, to the transmission to the UE 103, the node B 101 may also support similar services for a number of other UEs. Hence, the Node B 101 must communicate a potentially
15 large number of very small data blocks to individual UEs. Conventionally, this is very inefficient in cellular communication systems and results in a large overhead and very high resource consumption per transmitted data bit.

20 In accordance with the embodiment of FIG. 1, the Node B 101 comprises a Node B controller 107. The Node B controller 107 is operable to implement the functionality desired or required by a Node B 101 as is well known to a person skilled in the art.

25

In the example of FIG. 1, the Node B controller 107 is coupled to a Node B transceiver 109 which is operable to transmit and receive data over the air interface of the cellular communication system. In the specific embodiment,
30 the Node B controller 107 is operable to generate control information for the individual UEs in response to signals received from the UEs. For example, the Node B controller

107 may generate uplink power control or synchronisation (e.g. code timing synchronisation) data for each individual UE.

- 5 The Node B controller 107 is coupled to a combine processor 111. In accordance with the embodiment of FIG. 1, the combine processor 111 is operable to combine user equipment specific information for a plurality of user equipment to generate combined UE specific information. For example, the
- 10 combine processor 111 may receive power control and synchronisation data from the Node B controller 107 and combine these into a single block of control data comprising information for a group of UEs.
- 15 The combine processor 111 is coupled to an encode processor 113 which receives the combined UE specific information from the combine processor 111. For example, the encode processor 113 receives the data block of power control and synchronisation information from the combine processor 111.
- 20
- The encode processor 113 is operable to encode the combined UE specific information to generate data suitable for transmission. In the embodiment of FIG. 1, the encode processor 113 performs error correcting coding, interleaving
- 25 and symbol mapping for transmission.

In some embodiments, the encode processor 113 encodes data for each UE individually and independently of the data for other UEs. However, as described later, the encode processor

30 113 may in other embodiments perform a joint encoding wherein the data for different UEs is encoded together

resulting in encoded data which depends on UE specific information associated with more than one UE.

The encode processor 113 thus encodes the combined UE specific information and feeds it to the Node B transceiver 109 which transmits it over the air interface in a minimum transmission resource unit.

Hence, in accordance with the embodiment, a minimum transmission resource unit is generated which comprises UE specific information for a plurality of UEs. Hence, the embodiment may allow for UE specific information to be transmitted efficiently in granularities significantly lower than the resource granularity corresponding to the minimum transmission resource unit.

The minimum transmission resource unit typically depends on the specific embodiment.

The minimum transmission resource unit may be a single time code frequency resource allocation unit. For example in cellular communication systems, a resource allocation may generally allocate resource in the form of a resource unit corresponding to a specified carrier frequency, a specified time interval and a specified code division code. Thus, the minimum transmission resource unit may be the smallest time interval which can be allocated for one carrier and one code. Specifically, the minimum transmission resource unit may be a time slot of a Time Division Multiple Access (TDMA) or Time Division Duplex (TDD) cellular communication system. In some communication systems, code division is not applied and the minimum transmission resource unit may be determined

by the remaining parameters used for separation between UEs
- e.g. by time slots and carrier frequencies.

In some embodiments, other constraints may limit the minimum
5 size of resource units. Hence, the minimum size of a
resource unit used in a cellular communication system may be
determined by limitations in technical specifications which
have been standardised or by implementation constraints.

10 The minimum transmission resource unit may be the smallest
resource unit which can be transmitted continuously by the
Node B transceiver 109.

Hence, in accordance with the embodiment, the Node B 101 is
15 capable of transmitting UE specific data of a size much
smaller than the minimum transmission resource unit without
incurring an overhead determined by the size of the minimum
transmission resource unit. Hence, a much more efficient
communication of small amounts of UE specific information is
20 achieved.

The UE specific information for a plurality of UEs may for
example be transmitted in a single time slot using the same
channelisation code. The individual UEs may then receive the
25 time slot, decode the time slot and retrieve the UE specific
information for the individual UE.

Accordingly, the UE 103 comprises a UE transceiver 115 which
receives and transmits data over the air interface.

30 Specifically, the UE transceiver 115 receives the minimum
transmission resource unit and feeds this to a UE data
processor 117. The UE data processor 117 is operable to

26

decode the minimum transmission resource unit and to extract the UE specific information for the specific UE 103.

In the embodiment of FIG. 1, the UE 103 further comprises a UE controller 119 which implements all other functionality required by the UE 103 as is well known to the person skilled in the art.

In the embodiment of FIG. 1, the UE data processor 117 is coupled to the UE controller 119. Hence, as an example, the Node B 101 may transmit power control and synchronisation data for a plurality of UEs in a single time slot on a single channelisation code. The UE 103 may receive this transmission, decode it and extract the power control and synchronisation data for the UE 103. This data may then be fed to the UE controller 119 which may adjust the transmit power and timing of the uplink transmissions accordingly. Hence, an efficient system for transmitting low data rate control information is provided.

20

In order for the individual UE to select the relevant data, it is necessary for it to have knowledge of which data of the received minimum transmission resource unit is for that UE.

25

This may be achieved in many ways. In the embodiment of FIG. 1, the Node B 101 is operable to transmit data position information which is indicative of the position of UE specific information for the different user equipment. The position information may be transmitted in the minimum transmission resource unit or by another transmission. The position information may be direct and explicit. For

example, a message may be transmitted by the Node B 101 to all UEs specifically associating a UE identity with each data of the minimum transmission resource unit. As the same association may be used for a large number of minimum
5 transmission resource units, the resource usage associated with transmitting the position information may be kept acceptably low.

The position information may in some embodiments be provided
10 indirectly by e.g. associative information. For example, the position information may be related to other system or UE parameters, and from knowledge of these system or UE parameters, the position of data from a specific UE may be determined.

15

In the following, a more detailed description of an embodiment of the invention applicable to a 3GPP UTRA TDD mobile radio communications system is described. In particular, the description will focus on communication of
20 control information for a 1.28 Mcps TDD HSDPA service. However, it will be appreciated that the invention is not limited to this application but may be applied to many other cellular communication systems. The embodiment is compatible with the embodiment of FIG. 1 and will be described with
25 reference to this.

In the specific embodiment, downlink packet data services are offered by means of HSDPA and using the HS-DSCH transport channel. Within the system, a fair proportion of
30 HSDPA-active users do not have conversational-class traffic (ie: they are so-called data-only users). Accordingly a

significant number of UEs tend to exhibit a bursty traffic profile.

In the system, an uplink dedicated physical channel (DPCH) is associated with the HSDPA operation. A downlink dedicated physical channel is not configured. The uplink DPCH is controlled by information provided from the Node B 101. In particular, the code timing and transmit power levels are controlled by Transmit Power Commands (TPC) data and Synchronisation Shift (SS) commands transmitted from the Node B 101.

In the embodiment, the TPC command is binary, representing either "power-up" or "power-down". The SS command is tri-state representing either "up", "down" or "do nothing". Hence, in the example, the Node B 101 communicates six levels of control information at a rate sufficiently high for the dynamic requirements of the power control and the synchronisation.

20

In accordance with the exemplary embodiment, the TPC and SS bits for each UE are not transmitted on an individual channelisation code of a time slot. Rather a TDD minimum transmission resource unit is used to convey information destined for a plurality of users within a cell. A single minimum transmission resource unit (in this case one timeslot and one channelisation code) is used to communicate TPC and SS bits to a plurality of UEs.

Hence, in accordance with the embodiment, the combine processor 111 of the Node B 101 may combine the TPC and SS data bits generated for a plurality of UEs into a single data block which can be transmitted in one time slot and
5 with one channelisation code. Accordingly, one channelisation code is shared between a plurality of UEs thereby significantly reducing the number of channelisation codes used for communicating TPC and SS data and thus freeing up channelisation codes for other uses.

10 In some such embodiments, a new physical channel, henceforth denoted a Physical Layer Common Control Channel (PLCCH), may be implemented for efficient communication of TPC and SS data. The PLCCH may be implemented by transmission of messages on a single channelisation code of single time
15 slots with each transmission comprising TPC and SS data bits for a plurality of UEs. As the PLCCH is shared between different UEs, the resource use is significantly reduced compared to the conventional approach for communication of TCP and SS data for HSDPA services.

20

In some embodiments, the PLCCH is implemented by the combine processor 111 generating a combined data block by including one TPC data bit and two SS data bits for each UE of the PLCCH message. Furthermore, the PLCCH message may simply be
25 generated and transmitted by the encode processor 113 encoding the individual data bits of the data block in a suitable fashion.

However, in other embodiments the encode processor 113 is
30 operable to jointly encode the TPC and SS information which relates to a plurality of UEs.

For example, in order to send TPC and SS data to a single user, a six-state value must be signalled (two possible values for the TPC and three possible values for the SS data). Rather than using 3 bits to achieve this per user (15 bit for TPC and 2 bits for SS) as per the current 3GPP specifications, the TPC and SS data for a plurality of UEs may be jointly encoded.

For example, if the TPC and SS data for one user has 6 possible values, the TPC and SS data for five UEs has $6^5 = 7776$ possible data values. Thus, by generating a combined parameter value comprising information of the TPC and SS data for five UEs, a 7776 state value must be encoded. This can be achieved by thirteen bits ($2^{13}=8192$). In contrast, the individual encoding of the TPC and SS data will result in a requirement of $5 \times 3 = 15$ data bits. Hence a reduction in the number of data bits which must be transmitted is achieved.

As another example, in the prior art, 10 users using 1 bit for TPC and 2 bits for SS would require a total of $10 \times 3 = 30$ bits, and these would be distributed across multiple DPCHs (one to each user). However, by jointly encoding the commands across users onto a common PLCCH, this could be achieved using $10 \times \log_2(6) = 25.85$ (round up to 26) bits; a 13% saving. Furthermore as this can be transmitted on a single PLCCH message a very substantial reduction in the resource use is achieved.

It will be appreciated that the efficiency improvement may increase for increasing numbers of TPC and SS data being jointly encoded and that in some embodiments all TPC and SS data of a given PLCCH message may be jointly encoded.

In these examples, to decode the TPC and SS information, the UE would convert the received word into a base 6 number and select the digit position assigned to that user. The
5 resulting six-state value maps directly to both a binary TPC command and a tri-state SS command.

It will be appreciated that any suitable way of jointly encoding the information may be used in accordance with the
10 embodiment. For example, a simple one to one mapping between a block of TPC and SS bits for a plurality of UEs and an encoded PLCCH symbol representing the combined state may be implemented. The mapping may for example be implemented by a simple look-up table. The UE 103 may simply perform the
15 joint decoding by implementing the reverse one to one mapping and selecting the appropriate TPC and SS data bits of the result.

An example of an encode processor 113 using joint encoding
20 is shown in FIG. 2. The encode processor 113 of FIG. 2 comprises N input circuits 201 which receive the TCP and SS data bits from the Node B controller 107. The TCP and SS data bits for each UE are converted into a value in the range from 0 to 5 (inclusive) in state converters 203. The
25 output values of the state converters 203 are added in a summer 205. The sum is then encoded into a binary PLCCH word by a binary encoder 207. The resulting PLCCH word is then fed to a physical layer encoder 209 which generates the PLCCH message that is fed to the Node B transceiver 109 for
30 transmission.

In the example, the physical layer encoder may encode the PLCCH using $\frac{1}{4}$ rate or $\frac{1}{3}$ rate convolutional or $\frac{1}{3}$ rate turbo coding, or using no coding (as per the standard 3GPP release 99 transport channel processing). However, it should be understood that e.g. any generic forward error correcting entity could be used in its place, such as block codes, repetition codes, concatenated coding schemes etc.

In some embodiments, the encode processor 113 is operable to encode the PLCCH word by using processing algorithms of a group of algorithms used by a plurality of services.

Specifically, once constructed, traditional 3GPP transport channel processing could be employed to map the PLCCH word onto the physical channel(s). This means that the coding retains the full flexibility of the Layer 1 transport channel processing toolbox, and the PLCCH may be adapted to varying numbers of users (affecting the information bit rate) and to various system deployments and configurations.

20

As such, a transmit power or an encoding process for the PLCCH message may be determined in response to a number of UEs for which the minimum transmission resource unit comprises UE specific information. For example, for a small number of users, a low forward error correction code rate could be employed (this has more redundancy and requires less transmission power), whereas for a larger number of users a progressively higher code rate could be used (having less redundancy and higher transmit power requirements).

30

Additionally, if one physical channel transmission unit is not sufficient to carry the data for all of the intended

users, a further physical channel may be used. The data destined for each physical channel may be handled by an encoder separately for each, or it may be encoded together by a single encoding unit and separated only at the output of the encoder. The formation of the PLCCH would thus resemble that of FIG. 2 for $n=1..N$ UE's using the PLCCH. In this example, the data destined for multiple physical channels is encoded using a single encoder.

10 Thus, the use of a common TPC/SS physical channel (the PLCCH) may provide advantages in many embodiments. Specifically, for a given TPC/SS update rate, overall transmission power resources are reduced when compared to multiple DPCH or special burst transmissions. Furthermore, 15 the code resources used for the transmission of TPC and SS information to the multiple users are greatly reduced (many downlink DPCH's are potentially replaced by a single PLCCH).

A further and substantial benefit is that the uplink power 20 control and synchronisation update rates may be maintained if desired, whereas when using special bursts or multi-frame DPCH's (transmitted only every m^{th} frame), the update rate is correspondingly slower. (As will be known to the person skilled in the art special bursts are transmitted as a 25 "keep-alive" signal at certain regular periods when no higher layer data is available to map to a physical channel. In the time between special burst, discontinuous transmission (DTX) is used).

30 However, in some embodiments the Node B may be operable to transmit TPC and SS information for a given UE in intermittent PLCCH messages.

For example, the framing structure of 1.28Mcps TDD is repeated every subframe (5ms) and in some examples the PLCCH may not need to be transmitted in every subframe. This would allow flexible use of system resources as the number of UEs actively using the PLCCH is increased or decreased. However, there is of course some degree of trade-off in that the TPC and SS update rates are also a function of how often the PLCCH is transmitted.

10

Additionally, the information for a given user need not be present in each PLCCH instance. This would enable the system to handle higher loads without consuming more resources, at the expense of a slower TPC and SS update rate. Conversely, more resources could be used to handle higher loads without compromising TPC and SS update rates.

As a specific example, assuming a $\frac{1}{2}$ rate convolutional code is used, the minimum transmission unit of 88 channel bits (1 code at SF16, QPSK) would be able to convey 36 information bits. At $\log_2(6)$ bits per user, this could carry TPC and SS streams for approximately 14 users.

If the PLCCH were transmitted once per 5ms subframe, and the TPC and SS update rate for the uplink DPCH was once every (say) 10 or 20ms, it is clear that a single PLCCH could serve all active data-only HSDPA users in the cell (28 users at 10ms update rate, or 56 users at 20ms update rate). Here, a total of 13 SF16 downlink channelisation codes (previously used for downlink DPCH) are freed-up for use by other channels such as HS-DSCH by means of the invention. By being able to more efficiently use these codes, the

30

system is able to serve higher data throughputs in each cell.

In some embodiments, the Node B 101 may comprise means for
5 setting a transmit power for the PLCCH in response to a
transmit power requirement of the plurality of user
equipment. Specifically, the Node B controller 107 may
calculate a suitable power level for each UE addressed by
the PLCCH message, and the transmit power may be set to the
10 highest of these values as this should ensure that the PLCCH
message can be received by all UEs.

In general, the PLCCH must be received by multiple UE's and
for this reason it is impractical to minimise the
15 transmission power separately for each individual user.
Although this may result in some power efficiency loss for
the TPC and SS symbols, a far greater power saving is
generally made due to the fact that the redundant data
payload portions (ie: the non-TPC/SS symbols) of the
20 downlink DPCH (or so-called 'special bursts') no longer need
to be transmitted.

Simplistically, if e.g. 4 users had DL the DPCH powers P_1 ,
 P_2 , P_3 , P_4 , and these could be replaced by a single channel
25 of power $P_0 = \max(P_1, P_2, P_3, P_4)$, then it follows that $P_0 <$
 $(P_1 + P_2 + P_3 + P_4)$.

In some embodiments the PLCCH message may only comprise
synchronisation commands with the uplink power control being
30 achieved by other means (eg: using open-loop power control
methods).

In some embodiments, the PLCCH does not comprise verification data.

Since the PLCCH message contains information for a plurality of users, it is not of importance that all of the data is received correctly by each UE. The block or frame error rate (BLER or FER respectively) is thus not of particular relevance in determining TPC or SS error performance. Rather the post-decoded bit error rate (BER) has the most direct relevance to TPC and SS performance. Because of this, there is typically no explicit need to protect the integrity of the data block with a cyclic redundancy check (CRC) or other checksum technique.

The invention can be implemented in any suitable form including hardware, software, firmware or any combination of these. However, preferably, the invention is implemented at least partly as computer software running on one or more data processors and/or digital signal processors. The elements and components of an embodiment of the invention may be physically, functionally and logically implemented in any suitable way. Indeed the functionality may be implemented in a single unit, in a plurality of units or as part of other functional units. As such, the invention may be implemented in a single unit or may be physically and functionally distributed between different units and processors.

Although the present invention has been described in connection with the preferred embodiment, it is not intended to be limited to the specific form set forth herein. Rather, the scope of the present invention is limited only by the

accompanying claims. In the claims, the term comprising does not exclude the presence of other elements or steps.

Furthermore, although individually listed, a plurality of means, elements or method steps may be implemented by e.g. a
5 single unit or processor. Additionally, although individual features may be included in different claims, these may possibly be advantageously combined, and the inclusion in different claims does not imply that a combination of features is not feasible and/or advantageous. In addition,
10 singular references do not exclude a plurality. Thus references to "a", "an", "first", "second" etc do not preclude a plurality.

CLAIMS

1. An apparatus for transmitting user equipment specific
5 information from a base station to a user equipment in a
cellular communication system; the apparatus comprising:
means for combining user equipment specific information
for a plurality of user equipment to generate combined user
equipment specific information;
10 means for encoding the combined user equipment specific
information; and
means for transmitting the combined user equipment
specific information in a minimum transmission resource
unit.
15
2. An apparatus as claimed in claim 1 wherein the minimum
transmission resource unit is a time slot.
3. An apparatus as claimed in claim 1 wherein the minimum
20 transmission resource unit is a single time code frequency
resource allocation unit.
4. An apparatus as claimed in any of the previous claims
wherein the means for encoding is operable to jointly encode
25 user equipment specific information for at least two of the
plurality of user equipment.
5. An apparatus as claimed in claim 4 wherein the means
for encoding is operable to jointly encode user equipment
30 specific information associated with all user equipment of
the plurality of user equipment.

6. An apparatus as claimed in claim 4 or 5 wherein the encoding comprises forward error correcting coding
7. An apparatus as claimed in any of the claims 4 to 6 wherein the user equipment specific information comprises a plurality of parameters each having a number of possible values, and wherein the means for encoding is operable to encode the plurality of parameters by encoding a combined parameter having a combined number of possible values equal to the product of the number of possible values of the plurality of parameters.
8. An apparatus as claimed in any of the previous claims wherein the user equipment specific information comprises power control information.
9. An apparatus as claimed in any of the previous claims wherein the user equipment specific information comprises synchronisation information.
10. An apparatus as claimed in any of the previous claims wherein the user equipment specific information comprises only synchronisation information.
11. An apparatus as claimed in any of the previous claims wherein the user equipment specific information is associated with an uplink channel from each of the plurality of user equipment.
12. An apparatus as claimed in any of the previous claims further comprising means for setting a transmit power for the minimum transmission resource unit in response to a

transmit power requirement of the plurality of user equipment.

13. An apparatus as claimed in any of the previous claims
5 further comprising means for transmitting position information indicative of a position of user equipment specific information for a first user equipment.

14. An apparatus as claimed in any of the previous claims
10 wherein the user equipment specific information is control information associated with High Speed Downlink Packet Access (HSDPA) service.

15. An apparatus as claimed in claim 14 wherein the user
15 equipment specific information is associated with an uplink dedicated physical channel (DPCH) of the HSDPA downlink packet data service.

16. An apparatus as claimed in any of the previous claim
20 wherein the means for encoding is operable to encode the combined user equipment specific information by using processing algorithms of a group of algorithms used by a plurality of services.

25 17. An apparatus as claimed in any of the previous claims wherein the cellular communication system is a Time Division Duplex (TDD) cellular communication system.

18. An apparatus as claimed in claim 16 wherein the
30 cellular communication system is the UTRA (UMTS (Universal Mobile Telecommunication System) Terrestrial Radio Access)

TDD cellular communication system specified by the 3rd Generation Partnership Project.

19. An apparatus as claimed in claim 18 wherein the user
5 equipment specific information consists of Transmit Power Control (TPC) and Synchronisation Shift (SS) data.

20. An apparatus as claimed in any of the previous claims
further comprising means for determining a transmit power of
10 the minimum transmission resource unit in response to a number of user equipment for which the minimum transmission resource unit comprises user equipment specific information.

21. An apparatus as claimed in any of the previous claims
15 further comprising means for determining an encoding process for the minimum transmission resource unit in response to a number of user equipment for which the minimum transmission resource unit comprises user equipment specific information.

20 22. An apparatus as claimed in any of the previous claims wherein the minimum transmission resource unit does not comprise verification data.

23. An apparatus as claimed in any of the previous claims
25 wherein the means for transmitting is operable to transmit user equipment specific information for a first user in intermittent minimum transmission resource units.

24. An apparatus as claimed in any of the previous claims
30 wherein the minimum transmission resource unit corresponds to a minimum size transmission block of user equipment

42

specific information which can be transmitted by the means for transmitting.

25. An apparatus as claimed in any of the previous claims
5 wherein the apparatus is a base station

26. A user equipment for receiving user equipment specific information from a base station in a cellular communication system; the apparatus comprising:

10 means for receiving a minimum transmission resource unit comprising combined user equipment specific information for a plurality of user equipment; and

means for determining user specific information for the user equipment from the minimum transmission resource unit.

15

27. A user equipment as claimed in claim 26 wherein the combined user equipment specific information is jointly encoded; and wherein the means for determining comprises means for decoding the combined user equipment specific
20 information and for selecting the user equipment specific information for the user equipment.

28. A cellular communication system comprising
a first apparatus for transmitting user equipment
25 specific information from a base station to a user equipment, the first apparatus comprising:

means for combining user equipment specific information for a plurality of user equipment to generate combined user equipment specific information,

30 means for encoding the combined user equipment specific information, and

43

means for transmitting the combined user equipment specific information in a minimum transmission resource unit; and

the user equipment comprising:

5 means for receiving a minimum transmission resource unit comprising combined user equipment specific information for a plurality of user equipment; and

10 means for determining user specific information for the user equipment from the minimum transmission resource unit.

29. A method of transmitting user equipment specific information from a base station to a user equipment in a 15 cellular communication system; the method comprising the steps of:

combining user equipment specific information for a plurality of user equipment to generate combined user equipment specific information;

20 encoding the combined user equipment specific information; and

transmitting the combined user equipment specific information in a minimum transmission resource unit.

25 30. A method of receiving user equipment specific information from a base station in a cellular communication system; the method comprising the steps of:

receiving a minimum transmission resource unit comprising combined user equipment specific information for 30 a plurality of user equipment; and

determining user specific information for the user equipment from the minimum transmission resource unit.



ABSTRACT

5 **APPARATUS AND METHOD FOR COMMUNICATING USER EQUIPMENT
SPECIFIC INFORMATION IN CELLULAR COMMUNICATION SYSTEM**

A cellular communication system comprises a base station (101) and a plurality of user equipment (103). The base station (101) comprises a combine processor (111) which
10 combines user equipment specific information, such as power control commands or synchronisation information, for a plurality of user equipment (103). An encode processor 113 encodes the combined user equipment specific information and
15 a transceiver 109 transmits the combined user equipment specific information in a minimum transmission resource unit of the cellular communication system. The minimum transmission resource unit may be a single channelisation code in a single time slot. The UE (103) comprises a
20 receiver (115) for receiving the minimum transmission resource unit and a UE data processor (117) which decodes the minimum transmission resource unit and extracts the user equipment specific information for that UE (103). The invention may provide a more efficient communication of
25 small data blocks.

FIG. 1 to accompany the abstract.


1/2

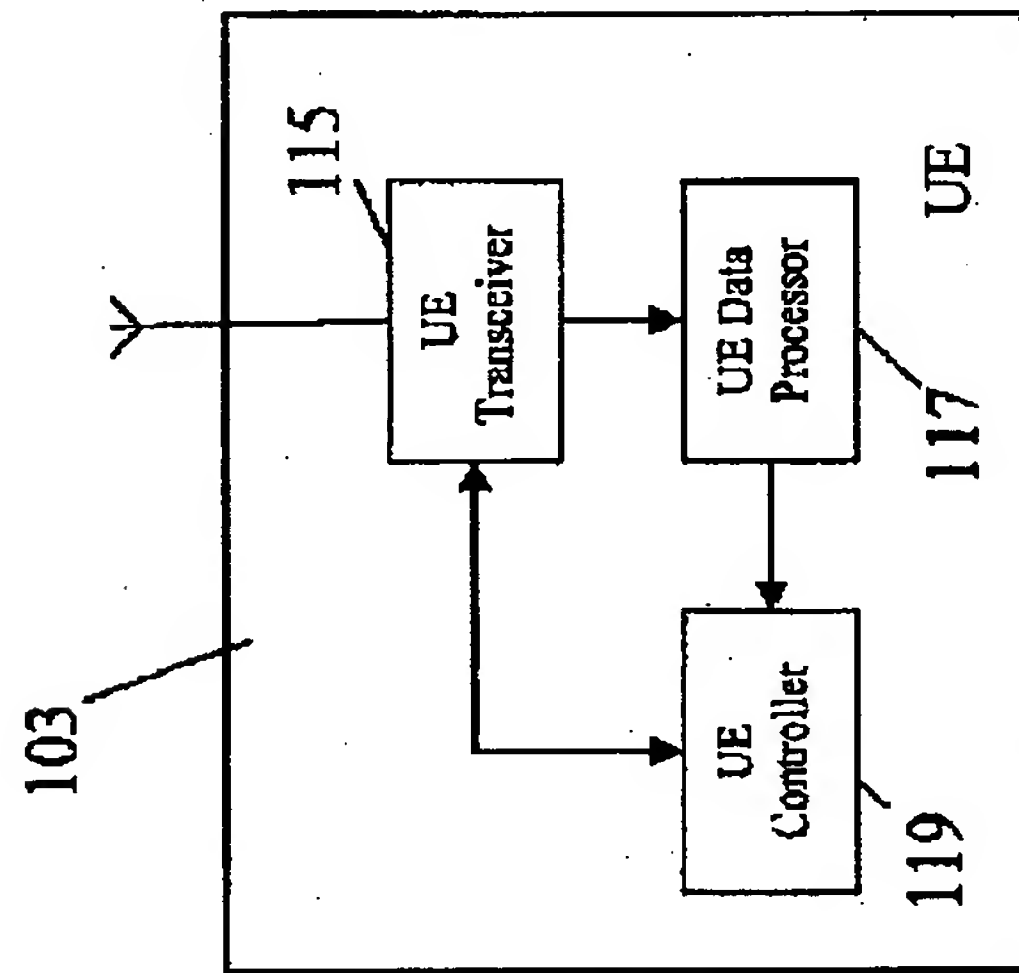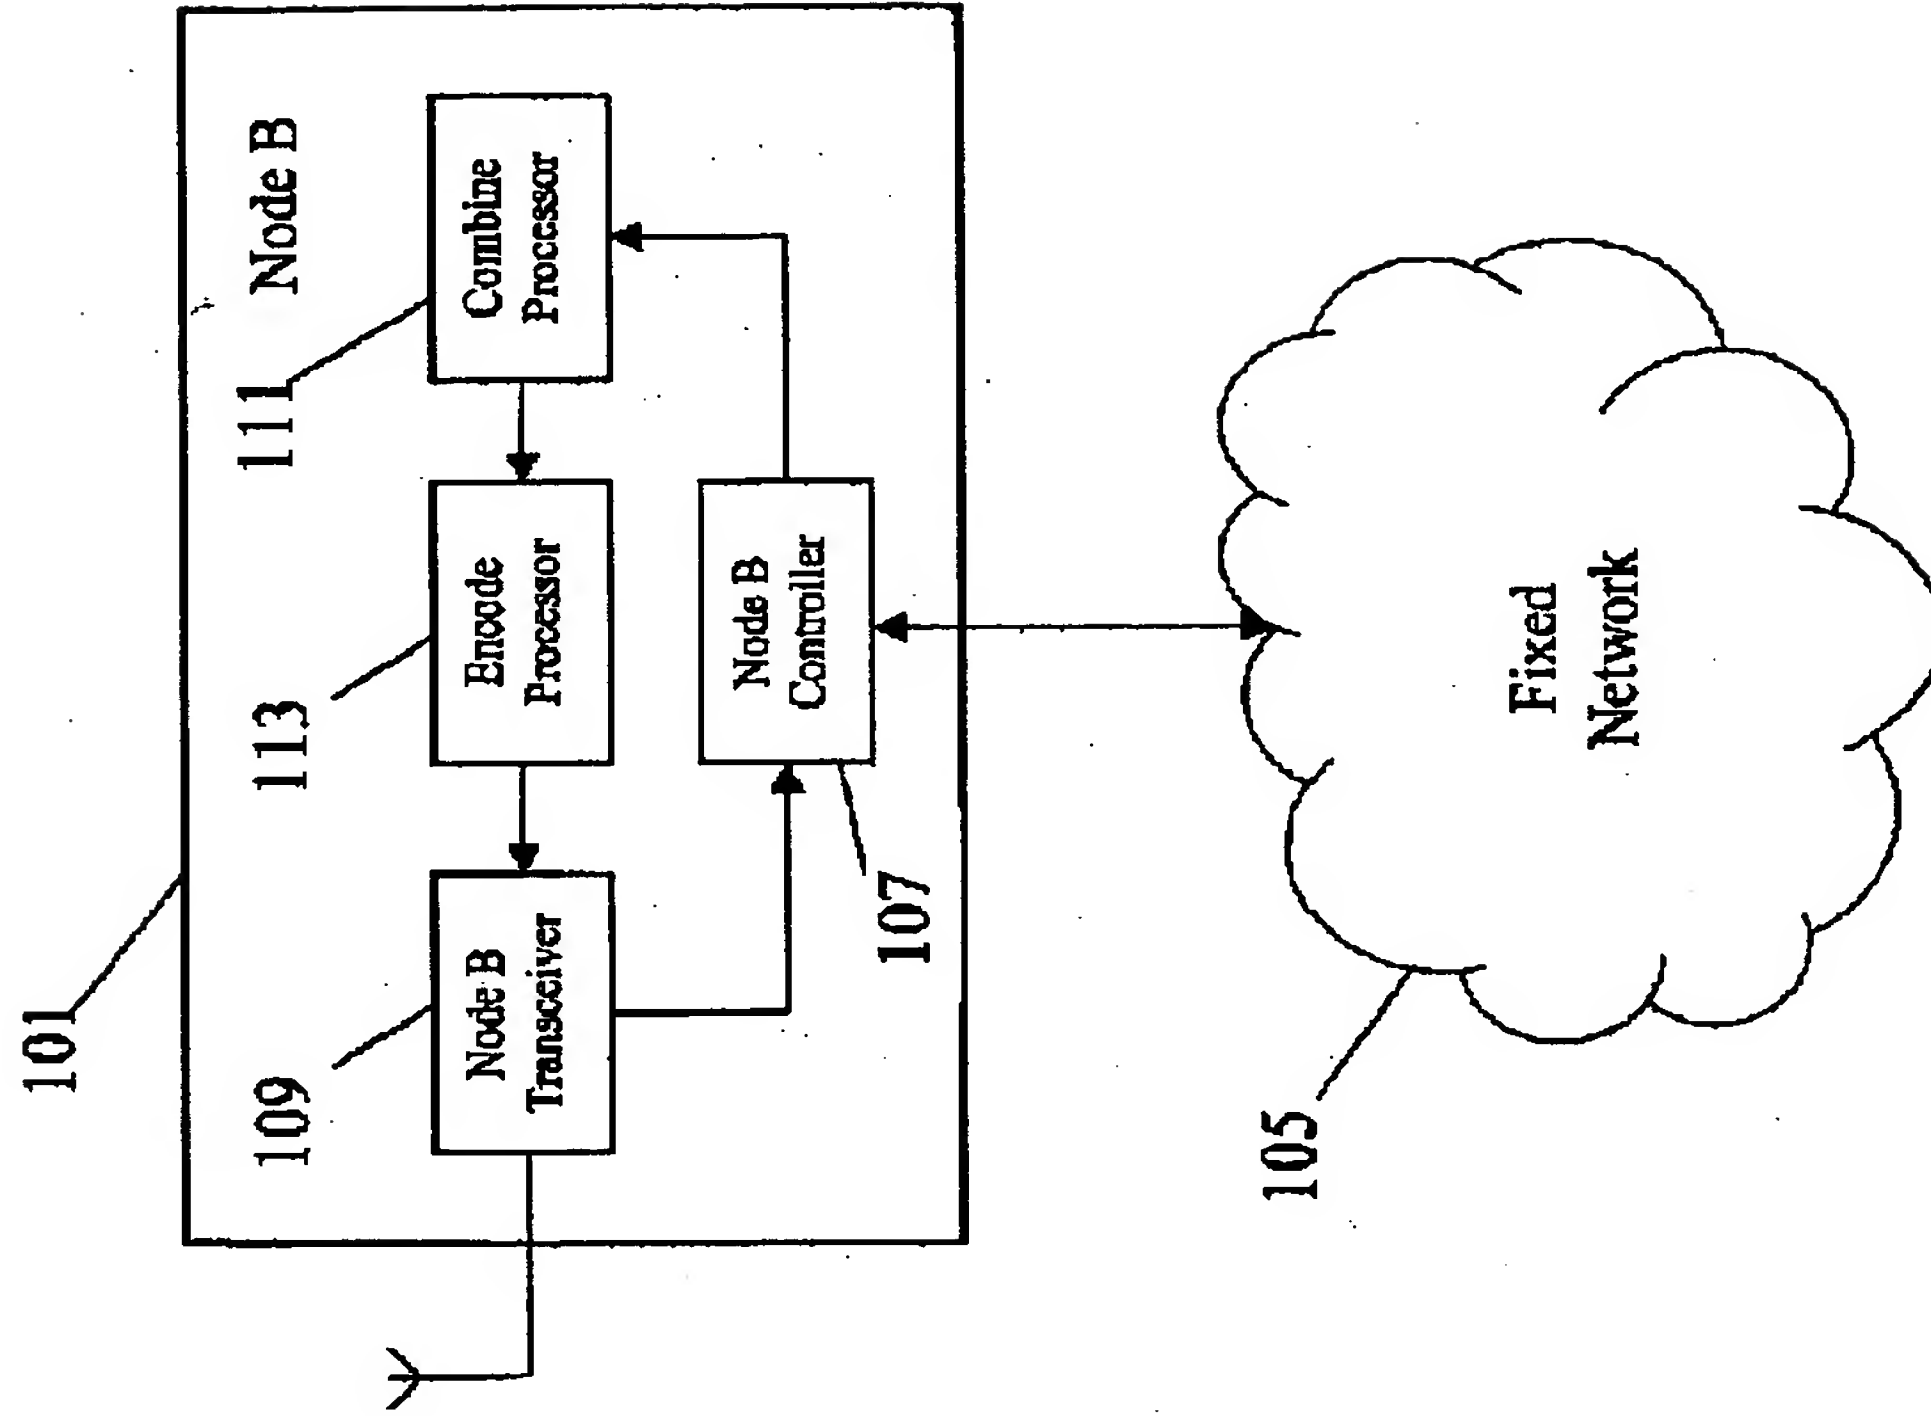

100

FIG. 1

2/2

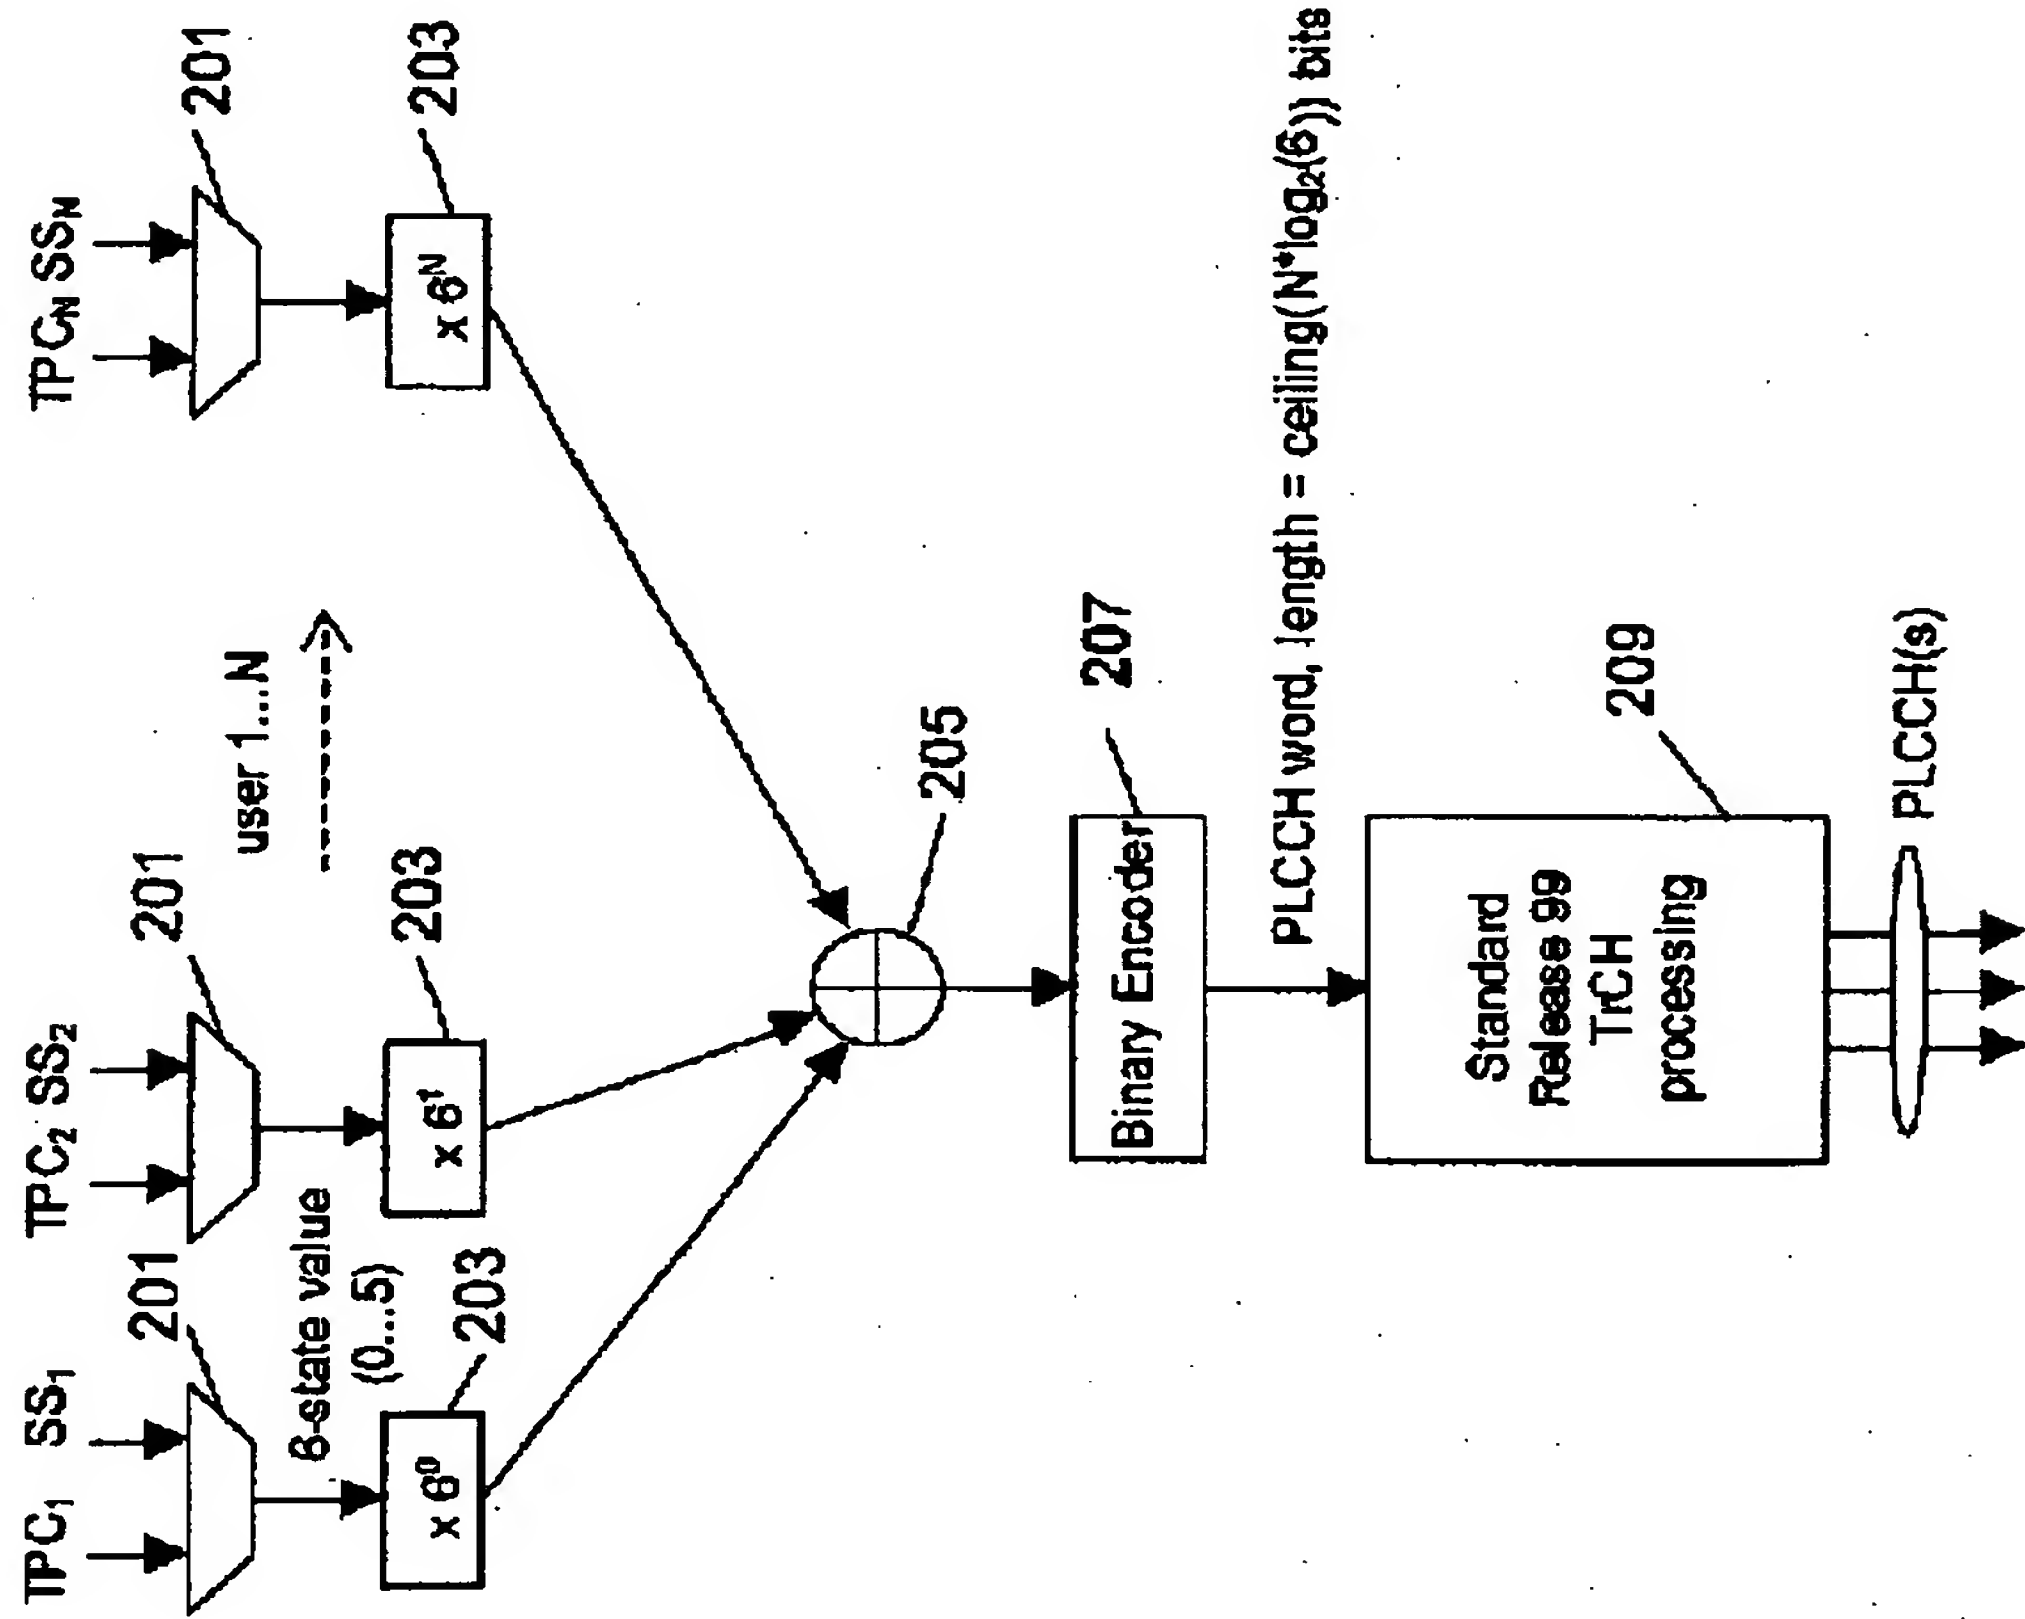

113

FIG. 2

